





NON-RATED EXTERIOR MDF DOORS

DOOR CONSTRUCTION

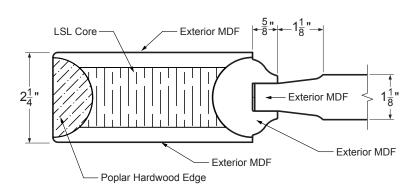









PRODUCT FEATURES & SPECIFICATIONS

Thickness $1 \ 3/4$ " or $2 \ 1/4$ " Maximum Size Single: $5' \times 10'$ (Custom sizes available) Pair: $10' \times 10'$

Door Material Engineered Stiles, Exterior MDF

Construction Method Stile and Rail

Finish Factory exterior prime or exterior

prefinish paint

Available Styles Any standard or custom design

that meets the specifications described in the document

Maximum Glass SizeVaries based on size and stylePanel ConstructionRaised Panel Thickness: 7/8" to 1 1/4"(Doors with panel and glass)Flat Panel Thickness: 1/2" or 3/4"

Panel Size

No Minimum panel size

[Doors with panel and glass]

No Maximum panel size

Stock Dimensions

Top Rail: 6"

Bottom Rail: 10"

(Can be larger to meet ADA requirements)

Stiles: Varies

Accoustic Rating Up to 34 STC rating

Standards ASTM E-152

Hardware Configurations Consult factory for approved

configurations

Warranty Limited 10 year exterior warranty